


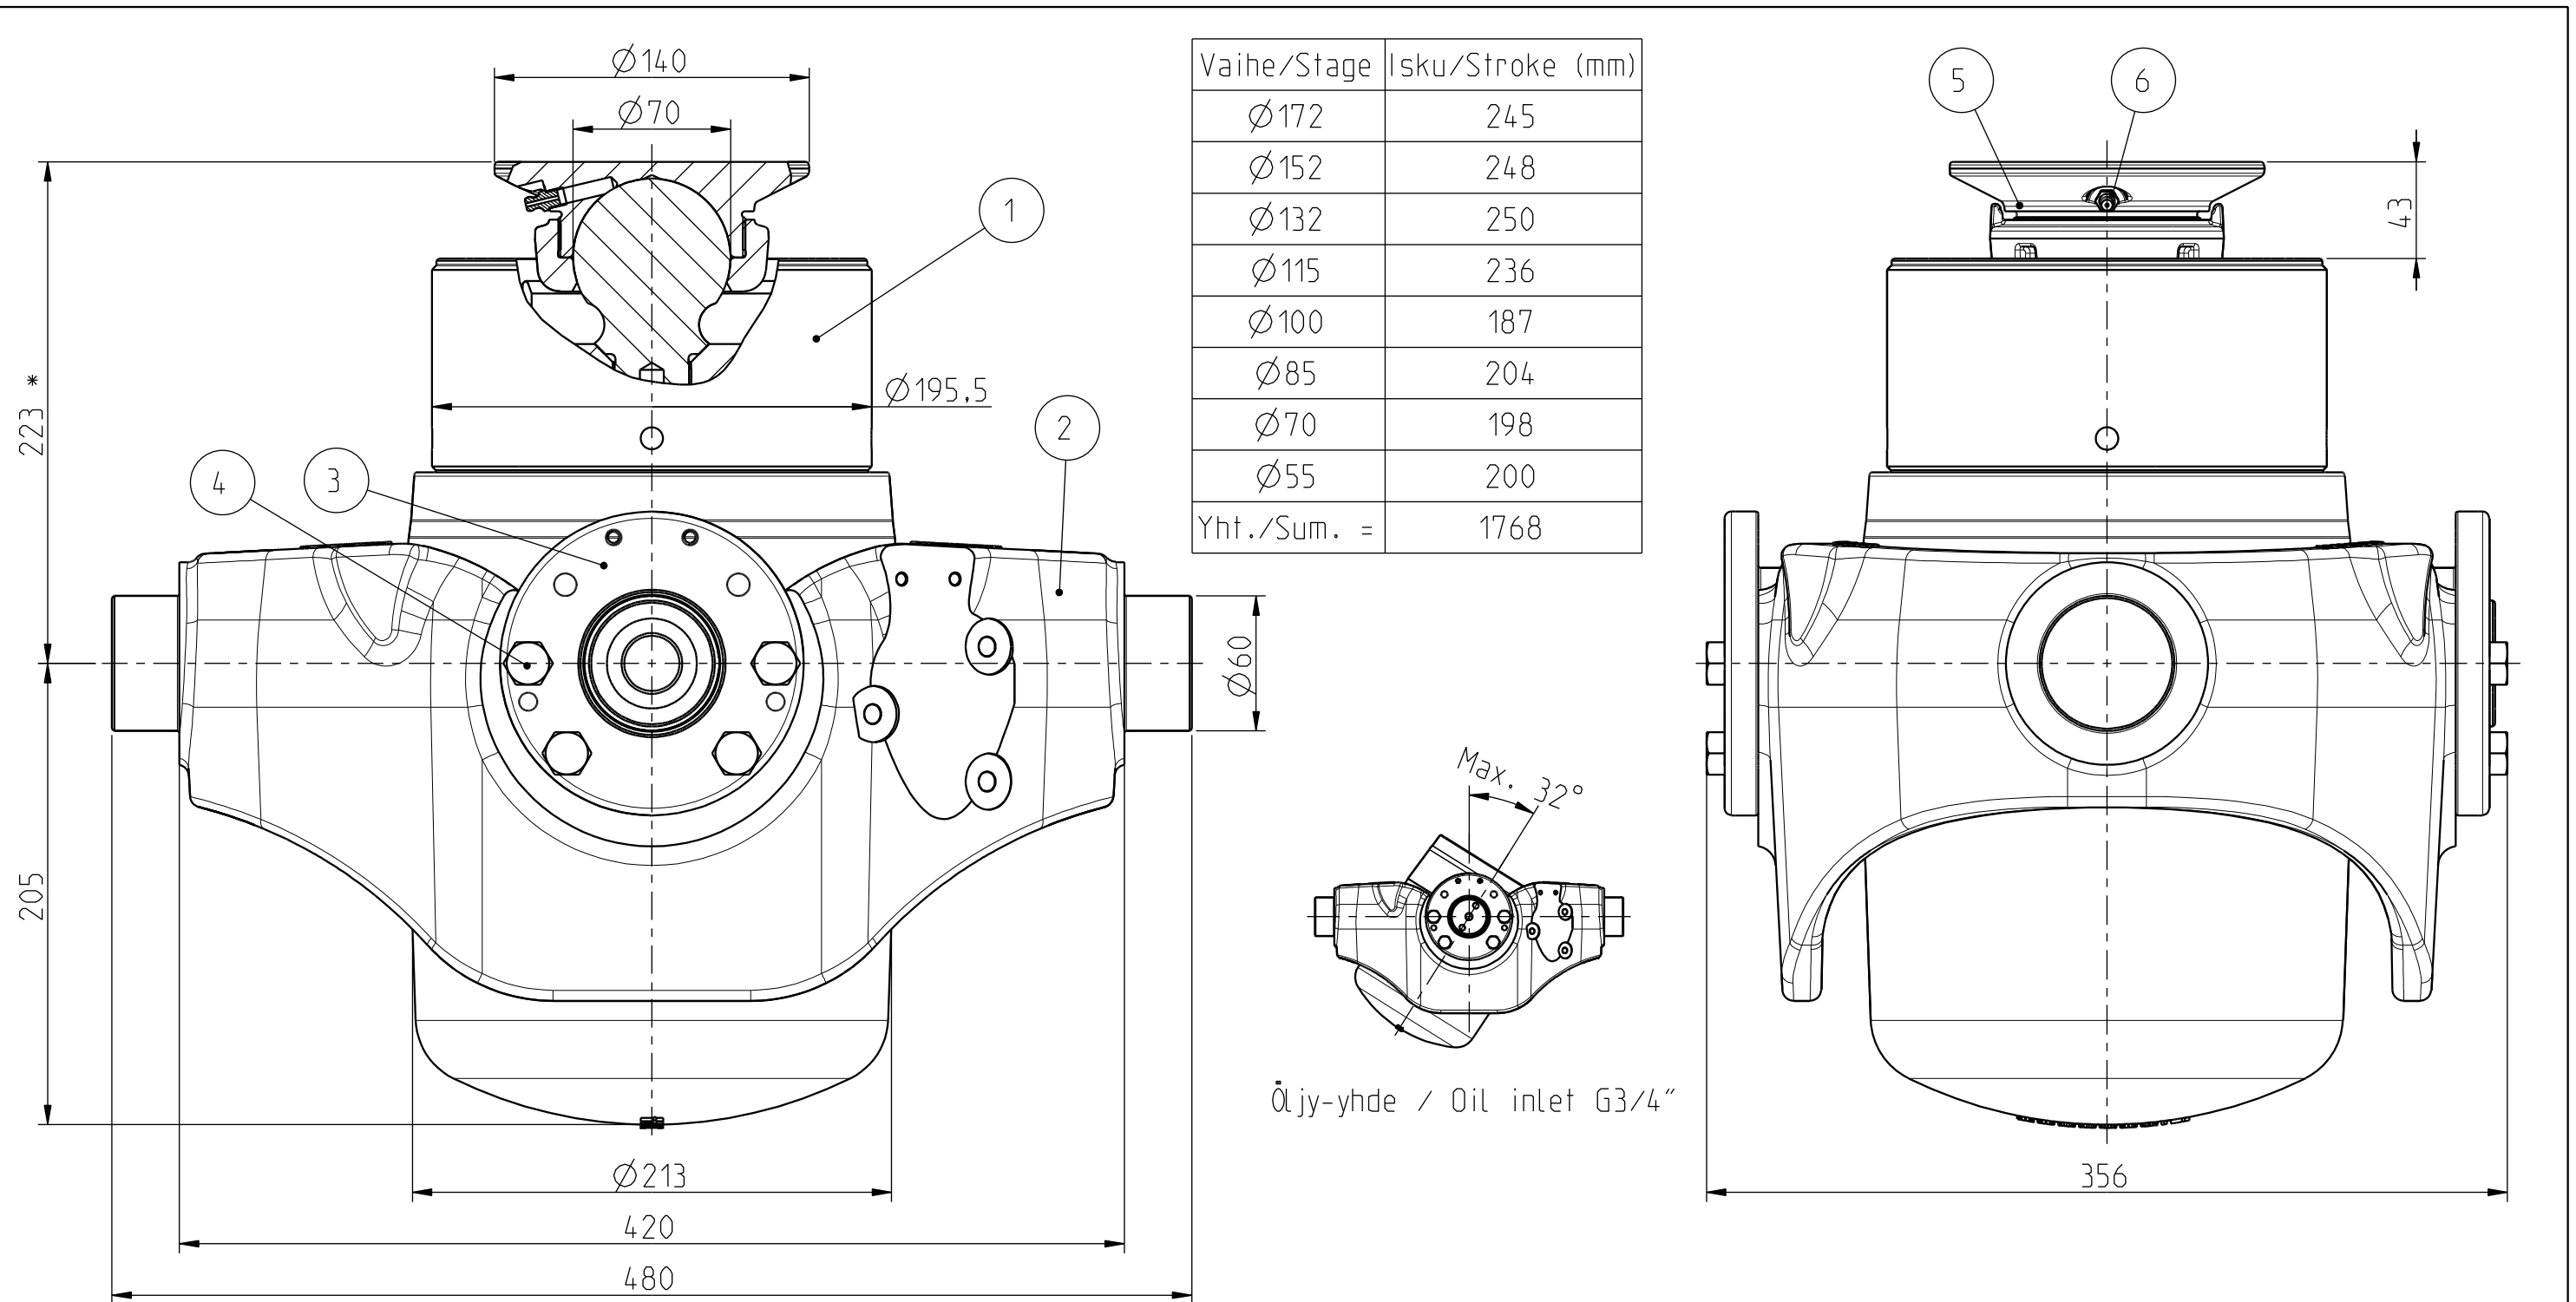

Öljy-yhde samalle puolelle rajoitin kierteiden kanssa /
Oil inlet to the same side with knock-off threads.


M12 ruuvien kiristysmomentti /
Tightening torque of the M12 screws 115 Nm.

Max. Paine / Pressure 280 bar (28 MPa).

Max. Kuorma / Load 25 t.

Iskutilavuus / Stroke volume 19.9 dm³

* + Asennusvara / Mounting space 15 mm.

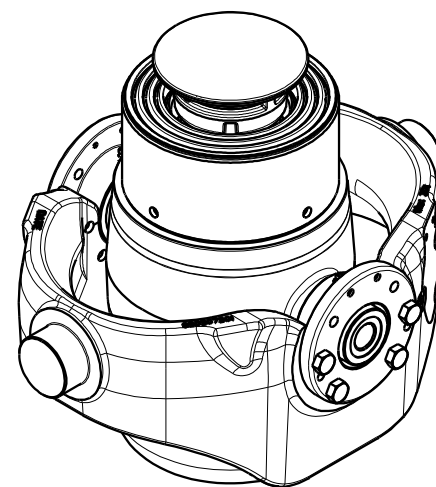

27.11.18	VSS	a1) paine/pressure 280 bar.		
Date	Drawn	Revision		
		Piirt Drawn	JMe	GENERAL TOLERANCE: ISO 2768-m
		Pvm Date	09.09.09	THREAD TOLERANCE : ISO 965-3/ISO 228-1
		Koko Size	A3	WELD ACCORDING TO: ISO 5817
		Liittyy / Belongs to		Koodi Code
		SUT22 HP LN		-
		Nimitys		Paino (kg) Weight
		NY SUT22 172-8-1768		119,168
		Name		Material STD -
		LU SUT22 172-8-1768		Material
				-
				Suhde/Scale
				7:20
				Revision
				A
				Piirustus no / Drawing no
				310227255