
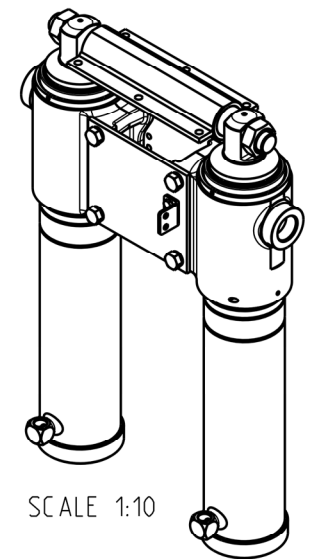
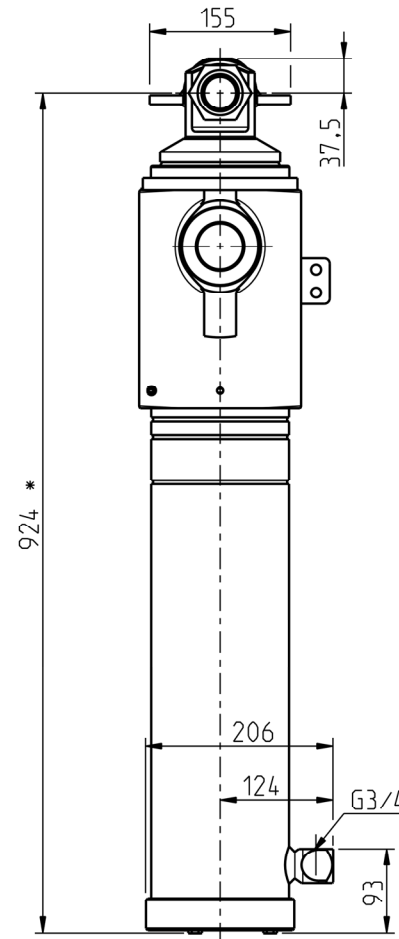


Tarkemmat asennusmitat piirustuksesta 300209200/
More detailed mounting dimension on drawing 300209200

Ø Vaihe Ø Stage	Isku/ Stroke mm
132	647
115	655
100	650
85	650
70	650
55	673
Yht/Total	3925

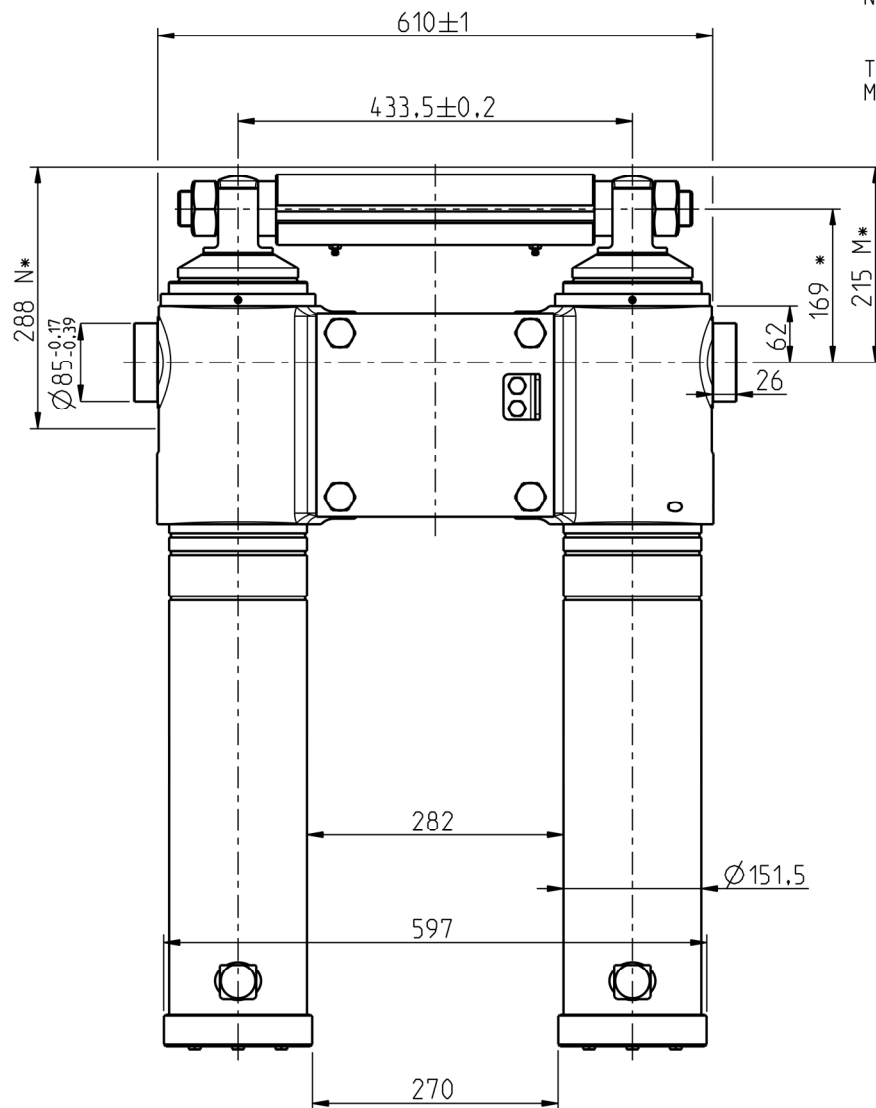

SCALE 1:10

Wipro Luottamuksellinen/Confidential

Iskutilavuus / Stroke volume 57.2 dm³

Max. paine / pressure 250 bar (25 MPa)

Max. kuorma / load 50 t

* Asennusvara / Recommended mounting space min. 15 mm

Date	Drawn	Revision
	Piirt Drawn TDA	GENERAL TOLERANCE : ISO 2768-m
	Pvm Date 22.09.23	THREAD TOLERANCE : ISO 965-3 / ISO 228-1
	Koko Size A3	WELD ACCORDING TO: ISO 5817
		Aihio Prefrom -
		Paino (kg) Weight 249.984
		Mat STD -
	Liitty / Belongs to	Material
	RTW 66 50†	--
	Nimitys	SRYHMÄ 152 / 55x3925
	Name	TWIN RAM 152 / 55x3925
		Suhde/Scale Revision
		17:100 -
		Piirustus no / Drawing no
		310210468